
10 07 2025

ENGICAM HMI ARM K.TOUCH 10.1

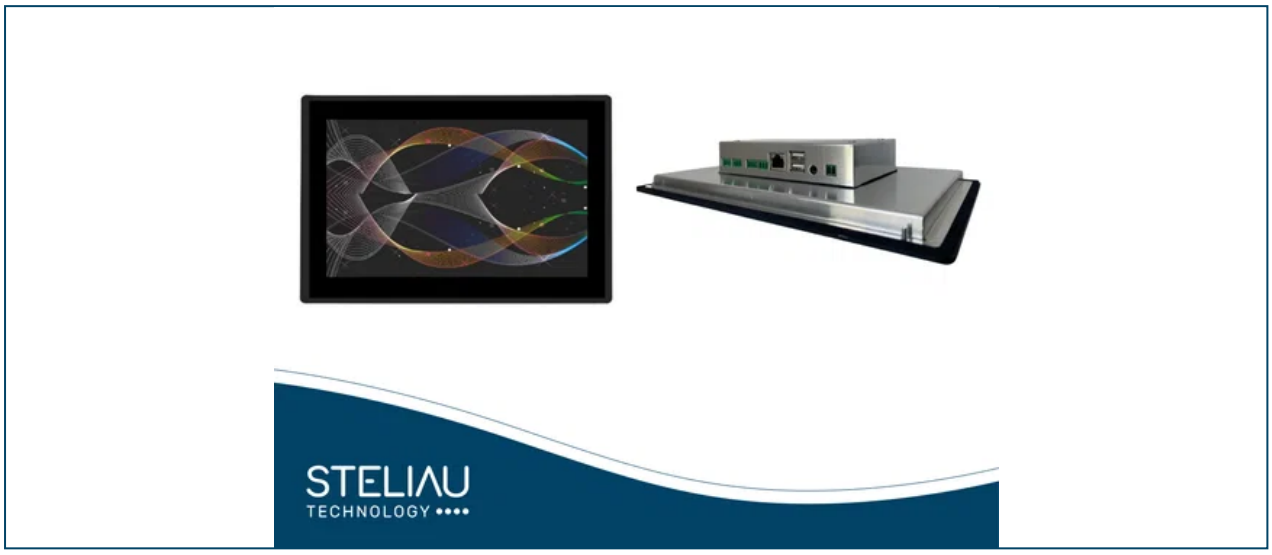

Capacitive touch 10.1 display + frame based on standard EDIMM2.0, front mount

- EDIMM 2.0 CPU modules compliant
- TFT 10.1 "
- Capacitive multi-touch display 1280x800 resolution
- Wide 15 to 30 Vdc single power supply
- Brightness 600 cd/mq
- up to 2x Ethernet 10/100/1000
- WiFi + BT
- 1x microSD
- 1x audio output
- 2x USB Type A
- 1x USB OTG device (Micro USB type)
- 1x CAN bus
- 1x RS485
- 1x RS232 (or alternative second CAN bus)
- 1x RS232 for OS Console
- 1x expansion connector (I2C, GPIOs, USB, SPI, Power supply +3,3V and 5V)
- 1x HDMI Standard Interface (not supported on all SOMs)
- General purpose LCD connector: 1x 18 or 24 bit single channel LVDS, Capacitive touch panel via USB or I2C, 1x PWM for backlight control, Power supply for LCD (+3V3, +5V, 12V)
- 1x LCD connector to drive dual LVDS channel displays

For full product
info and datasheet
Click here

Engicam

Engicam provides and develops powerful and efficient platforms with high content of technology.