

28V DC Bus Protection Using the PAL704-P15K36/T



OBJECTIVE

The PAL704-P15K36 and PAL704-P15K36T 15 kilowatt silicon transient voltage suppressors (TVS) designed for use primarily in 28 Volt aircraft applications in accordance with MIL-STD-704, MIL-STD-19500 and RCTA DO-160G. These assemblies typically operate with a minimum source impedance of 0.25 Ohms.

These devices have a peak pulse power rating of 15,000 Watts for a 1 ms waveshape and therefore can be used in applications where induced lightning on rural or remote transmission lines present a hazard to electronic circuitry. The PAL704-P15K36 is designed for high current short peak pulse transient applications, where as the PAL704-P15K36T is designed for extended peak pulse transients greater than 1 millisecond. In military and aerospace markets, protecting costly equipment – from vehicles to aircraft and beyond – from electrical events is a requirement.

BENEFIT


The PAL704-P15K36 and PAL704-P15K36T 15 kilowatt silicon transient voltage suppressors (TVS) designed for use primarily in 28 Volt aircraft applications in accordance with MIL-STD-704, MIL-STD-19500 and RTCA DO-160G standards. Module can be mounted on PCB or in a system cabinet.


COMPLIANCE

- MIL-STD-704 and MIL-STD-19500
- RTCA DO-160G

SOLUTION

- 1 x PAL704-P15K36
- Peak Pulse Power (10/1000µs): 15kW
- Stand-Off Voltage V_{WM} : 31.5V
- Max Peak Pulse Current I_{PPM} : 300A
- Max Forward Voltage V_F : 3.0V_{DC}
- Alternative 1 x PAL704-P15K36T

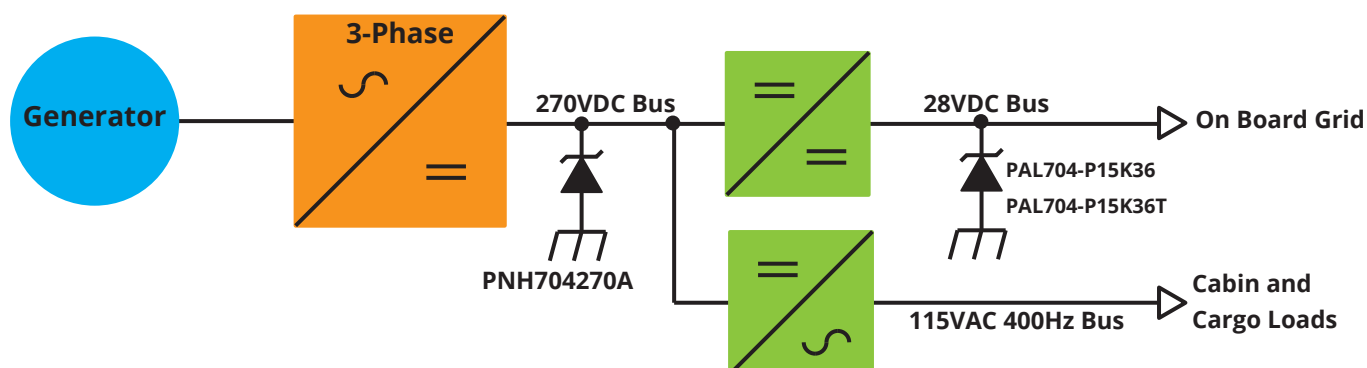



28V DC Bus Protection Using the PAL704-P15K36/T

COMPANY PROFILE

In business more than 30 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of over-voltage protection that include Transient Voltage Suppressor (TVS) Arrays, Steering Diode Array Hybrids, High-power Components and Modules, as well as Steering Diodes, EMI Filter/TVS Arrays and Thyristor Surge Suppressors. These components deliver circuit protection in electronic systems from numerous overvoltage events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices is an ISO 9001 certified company.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

Web

www.protekdevices.com